MODEL: CF 9442-A 6'


Parts List			
Parts	Description	Qty	
1	Headboard	1	
2	Footboard	1	
3	Side Rail Side Rail	2	
4	Side Rail Legs Wooden 115 x 70 x 50(H)	2	
5	Metal Centre Rail 2040mm	1	
6	Wooden Centre Rail 1490mm	2	
7	Support Leg 65mm	4	
8	Pump Mounting Bracket	2	

Parts	Description	Qty
9	Bracket Base	2
10	Gas Spring	2
11	Wooden Frame Bracket	2
12	Wooden Frame (holes are not the same)	1
13	Wooden Frame (holes are not the same)	1
14	Bottom Panel	3
15	Drawer Legs Wooden 35 x 45 x 50(H)	2
16	Footboard Drawer	1

Hardware List			
Parts	Description		Qty
А	M6 x 30 mm JCBC		8
В	M6 x 40 mm JCBC		18
С	M6 x 50 mm JCBC		2
D	M8 x 60 mm JCBC	<u> </u>	8
E	M6 Spring Washer	0	12
F	M6 Flat Washer		22
G	M8 Spring Washer	O	16
Н	M8 Flat Washer		16

Parts	Description	Qty
I	M8 Hex Nut	8
J	M4 x 25 mm CSK	
K	Allen Key M4 x 100 mm	1
L	Allen Key M5 x 70 mm	1
М	M8 Spanner) 1
N	Small Adjuster	∌ 4
0	M8 x 20 mm JCBB	1000 4
Р	M4 x 32 mm CSK	200000 2

Step 1 : Attach the pump mounting bracket (8) and bracket base (9) to the both side rail (3) using hardware parts B , E , F and K. Attach the legs (4) to the footboard (3) using hardware parts (C) and (K).

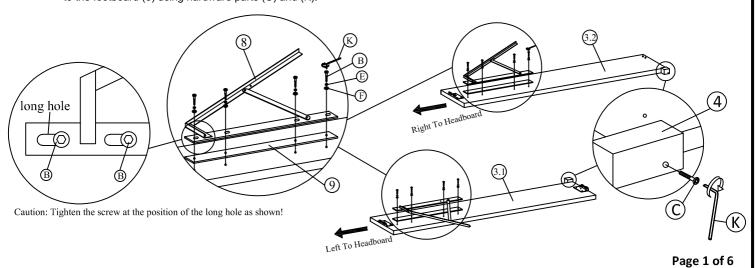


Step 2 : Attach the Drawer Leg (15) to the bottom Footboard Drawer (16).


Marking on the wooden

Bottom View !!


- Step 3: 3.1 Open the drawer out till its built-in stopping point.
 - 3.2 Put the drawer frame on the side rail leg. Make sure the drawer side align to the side rail end.
 - 3.3 Attach the drawer frame to the side rails by using the JCBC and Flat Washers.

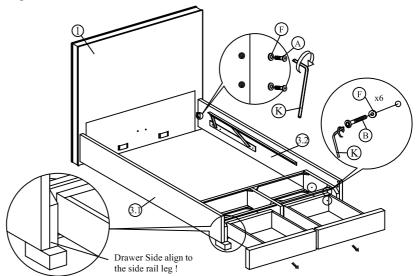


Step 4 : Attach the footboard (2) to side rails (3) by pushing the brackets down into place and secure the bolts using hardware part L as shown.

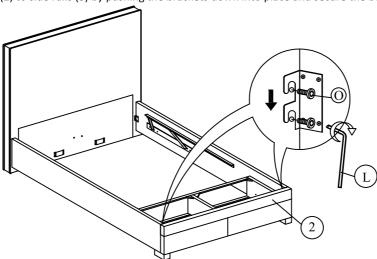


Step 5: Attach the support legs (7) to the centre rail (6) using hardware parts B and K.

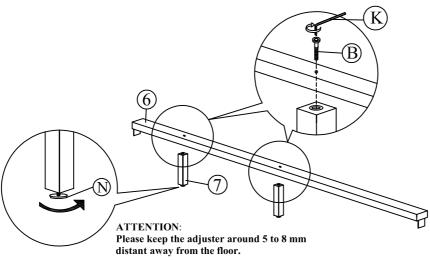


Step 6: Insert the centre rail (6) to the headboard (1) and footboard (2).




Step 7: Insert the bottom panel (14) to the below frame.




Step 8: Insert the centre rail (5) to the headend (1) and footend (2) and secure using hardware part A and K.

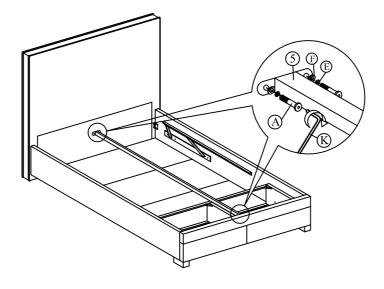


Step 9: Unscrew the Pre-attached hex-nut of gas spring (10) and attach it back again as shown. Please fully tighten the nut.

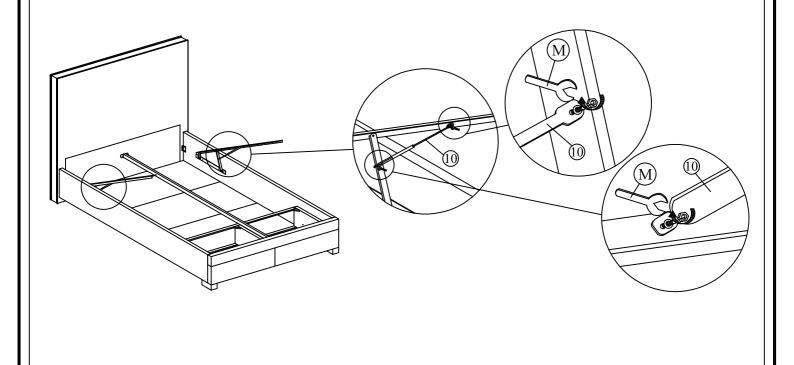


Step 10: Must place the wooden frame (12 & 13) in correct position (please follow the position as shown in diagram).

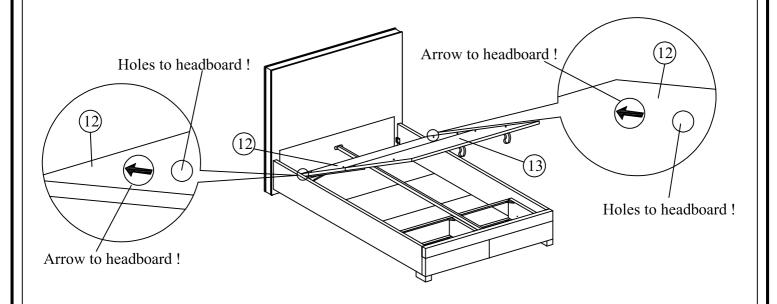

Step 11: Assembly the wooden frame (12) and wooden frame (13) to the bracket and tighten all the fitting accordingly.

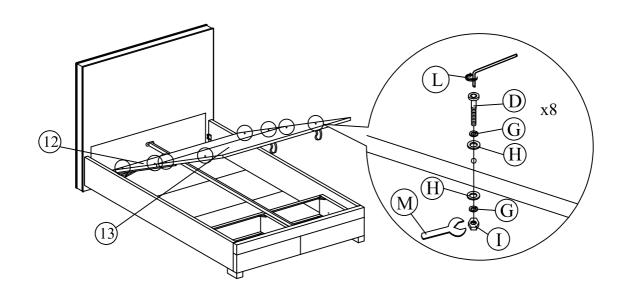

Step 12: ttach the wooden frame bracket (11) to the wooden frame using hardware parts J and a screwdriver (not provided).

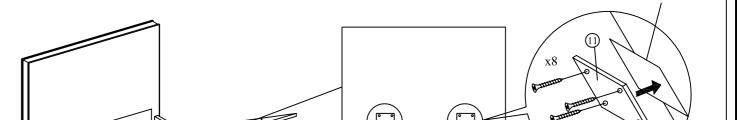

Please follow the marking and attach the bracket accordingly

Wooden Frame Bottom View



